


SIZES AND SPECIFICATIONS OF THE RAMPS (DIMENSIONS, MM):

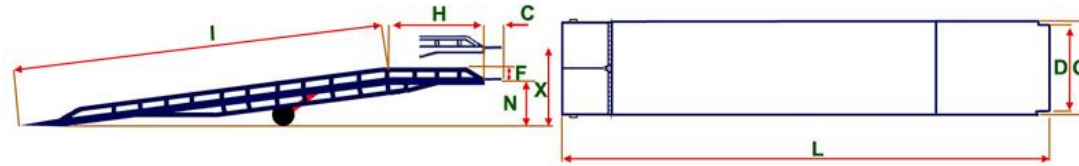

#	Model	Weight capacity, tons	I	H	C	L	D	O	N	X
1	RL-MR-STD6	6	8010	2230	270	10510	1990	2230	890	1640
2	RL-MR-STD8	8	8010	2230	270	10510	1990	2270	890	1640
3	RL-MR-STD10	10	8510	2430	270	11210	1990	2310	890	1640
4	RL-MR-STD12	12	8510	2430	270	11210	1990	2350	890	1640
5	RL-MR-SML6	6	8010	730	270	9010	1990	2230	890	1640
6	RL-MR-SML8	8	8010	730	270	9010	1990	2270	890	1640
7	RL-MR-SML10	10	8510	730	270	9510	1990	2310	890	1640
8	RL-MR-SML12	12	8510	730	270	9510	1990	2350	890	1640
9	RL-MR-CHP6	6	8010	730	270	9010	1590	1820	890	1640
10	RL-MR-CHP8	8	8010	730	270	9010	1590	1860	890	1640
11	RL-MR-CHP10	10	8510	730	270	9510	1590	1900	890	1640
12	RL-MR-CHP12	12	8510	730	270	9510	1590	1940	890	1640
13	RL-MR-THN6	6	8010	2230	270	10510	1590	1830	890	1640
14	RL-MR-THN8	8	8010	2230	270	10510	1590	1870	890	1640
15	RL-MR-THN10	10	8510	2430	270	11210	1590	1910	890	1640
16	RL-MR-THN12	12	8510	2430	270	11210	1590	1950	890	1640
17	RL-MR-BIG6	6	9210	2530	270	12010	1990	2230	890	1640
18	RL-MR-BIG8	8	9210	2530	270	12010	1990	2270	890	1640
19	RL-MR-BIG10	10	9910	2830	270	13010	1990	2310	890	1640
20	RL-MR-BIG12	12	9910	2830	270	13010	1990	2350	890	1640